




Certified to UL STD. 763 and NSF Std. 08

GALILEO 350 EVO TOP

14" Deli / Supermarket slicer

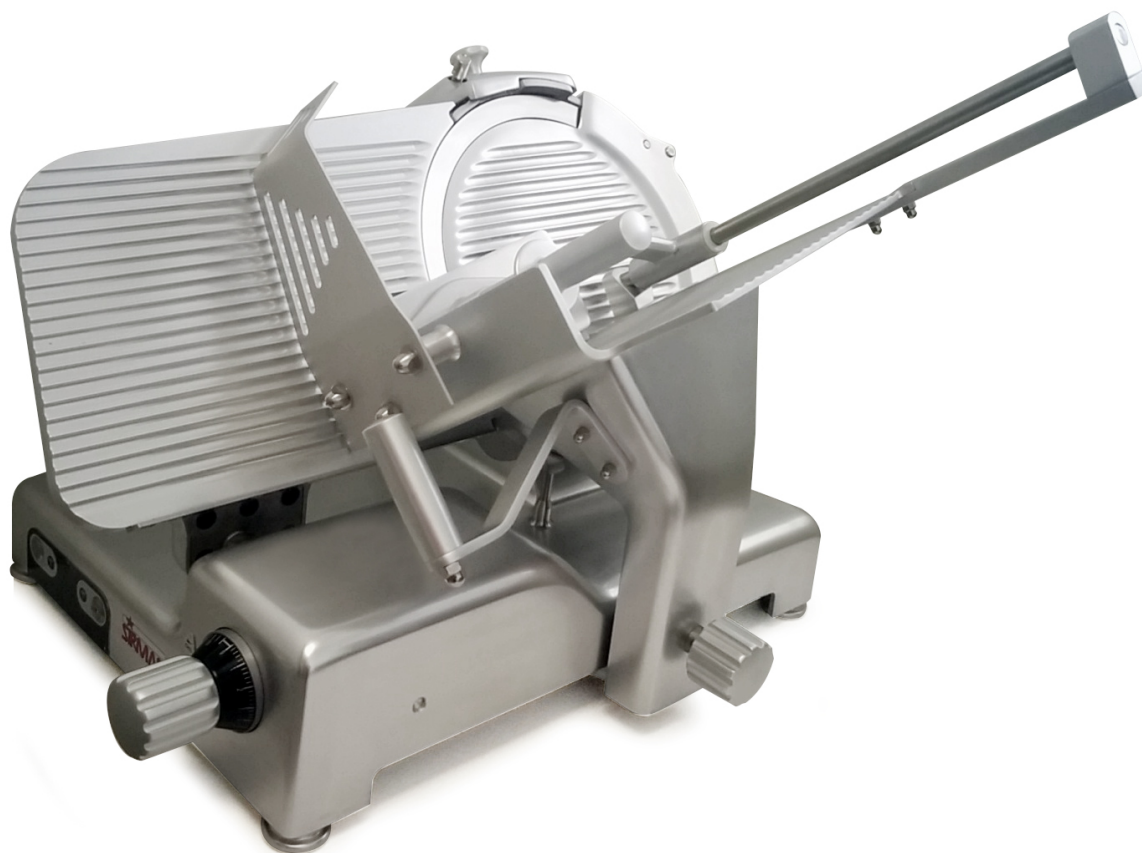

Dependability, Yield and Profitability

- One-piece sanitary polished and anodized aluminum construction
- Widest cutting capacity in a compact footprint
- Low-profile, ergonomic design with an extremely smooth carriage motion
- 1/2 Hp heavy-duty motor for continuous service and higher torque for cheese slicing
- Stainless steel controls, IP67 dustproof and waterproof rating
- Dual stage cam system allows precise, thin and thick slicing
- Complete stainless steel drive shaft assembly
- Built-in sharpener for perfect results and safety - unlike remote devices
- Waterproof from above

Operation:
Construction:
Knife:
Sharpener:

Gravity feed.
Polished, anodized aluminum alloy.
One piece, chromium plated 100Cr6 forged carbon steel blade.
Built-in, removable, two stone dual action.

Hygiene and Safety

- Rounded, edgeless design
- Increased gap between blade and machine body
- Aluminum see-through hand guard
- Improved blade guard removal system
- Zero blade exposure to prevent injuries when cleaning
- Removable carriage with zero blade exposure
- Permanent blade rim guard covering the non-slicing portion of the blade edge
- Overload protection
- No volt release
- Certified to the new NSF ANSI 8 2010 standard

Slice thickness: Infinitely variable up to 13/16"
Motor: 1/2 Hp (410 W), fan cooled.
Electrical: 120V AC, 60Hz, 3.4A (220V, 50Hz available on request).
Plug & Cord: Attached, flexible, 3 wire SJT 18 AWG, 6'4" long cord.
Switch: IP 67 controls with stainless steel on/off buttons.



sirmanusa@sirman.com www.sirman.com




Improved blade guard removal system



Completely sealed stainless steel shaft



NSF ANSI 8 design

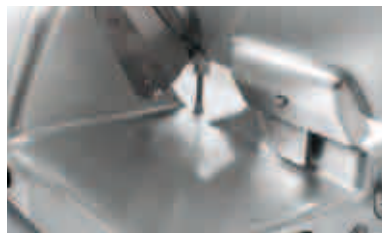

Large receiving tray



Increased gap between blade and machine body



End weight placed underneath carriage for easy cleaning and product loading






Aluminum see-through hand guard



Ergonomic carriage handle



Removable end weight pusher

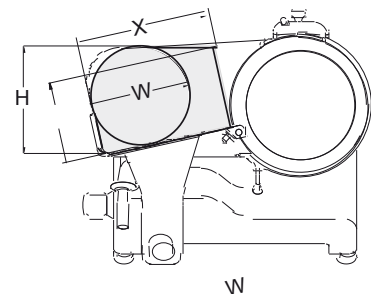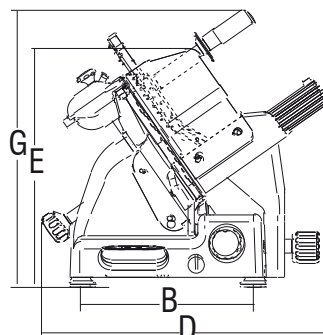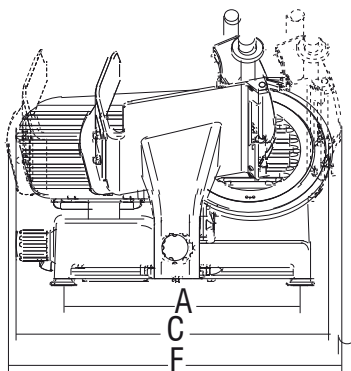

	Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Hopper	A	B	C	D	E	F	G	X	Y	H	W	Net weight	Shipping	Gross weight
	mm/inch	watt/Hp	inch.	rpm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
Galileo 350 EVO TOP	350/14"	540-0.73	1 ³ / ₁₆ "	216	14 ³ / ₈ "	13 ³ / ₄ " x 12 ⁵ / ₁₆ "	22 ⁵ / ₈ "	16 ¹ / ₈ "	28 ³ / ₄ "	29 ¹ / ₈ "	20 ¹ / ₂ "	31 ⁷ / ₈ "	22 ¹ / ₁₆ "	11"	7 ¹ / ₂ "	11 ⁵ / ₈ "	9 ¹³ / ₁₆ "	125	34 ¹ / ₂ " x 36 ¹ / ₁₆ " x 29 ¹ / ₂ "	160