



K-123 6" EXTENDED SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 1.0 GPM/3.8 LP
THREAD: 55/64 - 27 FEMALE

Item #: _____ Qty #: _____

Model #: _____


Project #: _____

FEATURES:

- 6" swivel "D" style spout.
- 4" O.C. water supply.
- Quarter-turn wedge style handles.
- Colored hot & cold Indexes.
- 1.0 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

- Brass chrome plated body & spout.
- Chrome plated handles.




[Click This Link To View Assembly Sheet](#)



BOTTOM VIEW
1/2" NPS (OUTSIDE THREAD)
3/8" NPT (INSIDE THREAD)

DIMENSIONS and SPECIFICATIONS

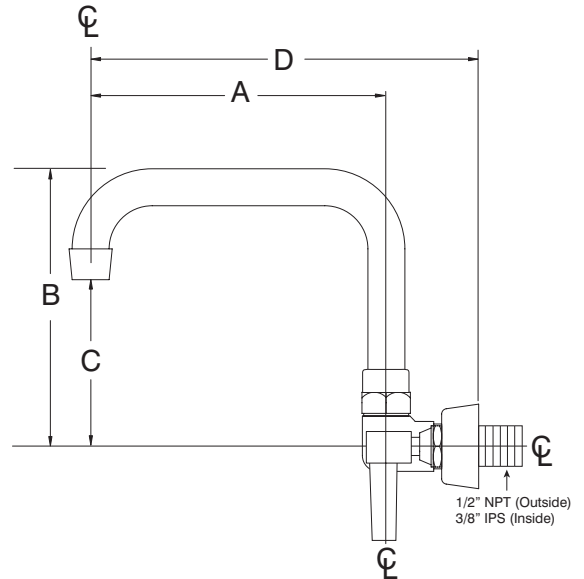

A Length	B Height	C	D	On Center Dimensions
6"	5"	2 1/2"	8"	4" O.C.

Options & Accessories

Replacement Spout For K-123 Faucet

6" Extended Spout Only.

K-51SP

Low Flow Aerator

.5 GPM

K-08



Replacement Cartridges*

K-00A (Set of 2)



Replacement Handles*

K-00C (Set of 2)



Wrist Handles*

K-316-LU (Set of 2)

For a Complete faucet with Wrist Handles,
See our **K-316** Spec Sheet.



*Can Only Be Used On Faucets Purchased After January 2016.
For Older Faucets, Consult Customer Service.

WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933